


CB 56T VA

Wall mounted speaker 6 W

EN 54 24

FEATURES

- The 6W powered speaker is equipped with a 165mm full-range loudspeaker and a 100V transformer with 3 power adjustments 6/3/1.5W.
- The high-density, shock-resistant MDF wood housing in white provides a low resonance sound. A sturdy front grille made of steel guarantees enduring stability.
- For additional reliability, a 2 pin-ceramic block, a thermal fuse is provided and the speaker chassis is impregnated against wetness.
- The speaker is also secured with the high protection class IP 54 against the security risks of environmental influences.
- The proven spring clamp on the rear plate ensures a quick mounting on walls.

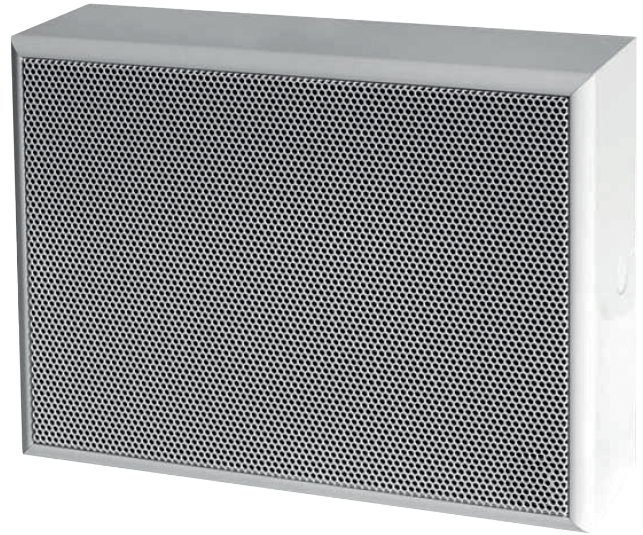


TECHNICAL CHARACTERISTICS

MODEL		CB 56T VA							
Power	Dimensions (LxWxH)	Weight	Color	Sensitivity (1W/4W) EN 54-24	Frequency response (Hz)	Directivity 500 Hz	Directivity 1 kHz	Directivity 2 kHz	Directivity 4 kHz
6 / 3 / 1.5 W	253 x 194 x 82 mm	1.95 kg	White	81 dB	172 > 23.5 K	180°	160°	125°	89°

MOUNTING INSTRUCTIONS

1. Put the connection cable through the cut-out of the rear panel.
2. Fix the rear panel with the wall. Use the attached screws.
3. Connect the cable with the 2 pin-ceramic block.
4. Place the speaker enclosure to the rear wall on one side, so that the spring clamp engages in the drilled hole. Press the second spring clamp with a screwdriver to the inside and at the same time the speaker to the wall, so that the second spring clamp engages. Use the included plastic caps to cover the drilled-holes at both sides.

Power Tappings	
Black	COM
White	1.5 W
Green	3 W
Red	6 W

 n° 1438 22 Certificate n° : 1438-CPR-0868	EN 54-24 Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings
	CB 56T VA Type A