


# CB 56T VA

## Wall mounted Speaker


### 6 W

EN 54 24




- The 6W powered speaker is equipped with a 165mm full-range loudspeaker and a 100V transformer with 3 power adjustments 6/3/1.5W.
- The high-density, shock-resistant MDF wood housing in white provides a low resonance sound. A sturdy front grille made of steel guarantees enduring stability.
- For additional reliability, a 2 pin-ceramic block, a thermal fuse is provided and the speaker chassis is impregnated against wetness.
- The speaker is also secured with the high protection class IP54 against the security risks of environmental influences.
- The proven spring clamp on the rear plate ensures a quick mounting on walls.

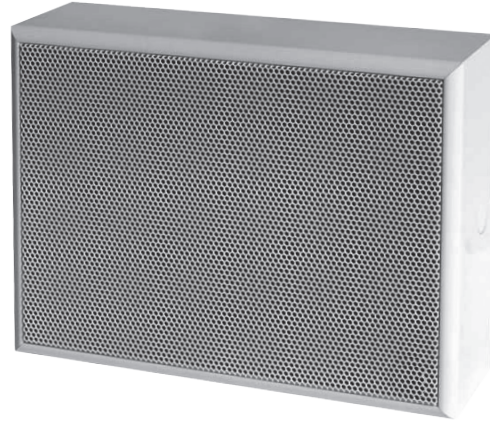

Model	CB 56T VA
Body & grill	MDF, Steel
Nominal power	6W
Nominal Impedance	1667Ω
Power 100V Line	6 / 3 / 1.5W
Impedance	1667 / 3.333 / 6.667Ω
Bandwidth	197 - 21,900Hz
Sensitivity (1W/1m)	93dB
SPL MAX 1m	100.8dB
Directivity (H-V) @ 500Hz	180°
Directivity (H-V) @ 1kHz	160°
Directivity (H-V) @ 2kHz	125°
Directivity (H-V) @ 4kHz	89°
Speaker	5"
Cone	Paper
Dimensions (WxHxD)	254 x 195 x 81mm
Weight	1,95kg
Operating temperature	-10 to +55°C
Protection Index	IP54
Color	White

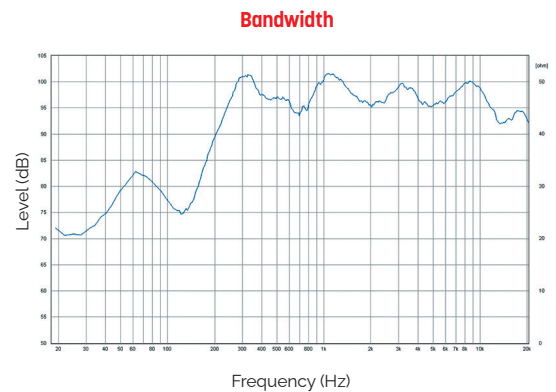

### Polar diagrams

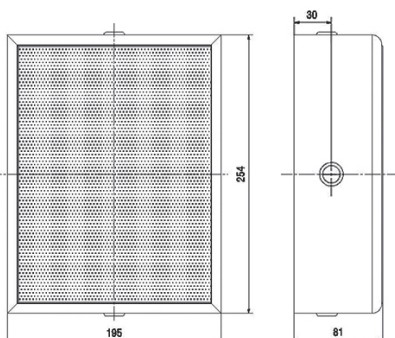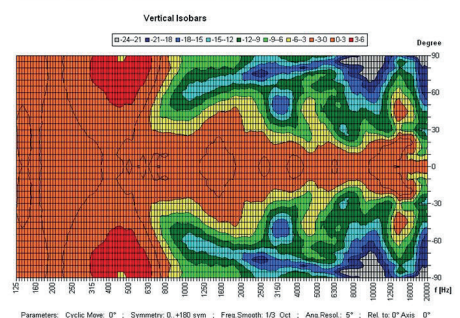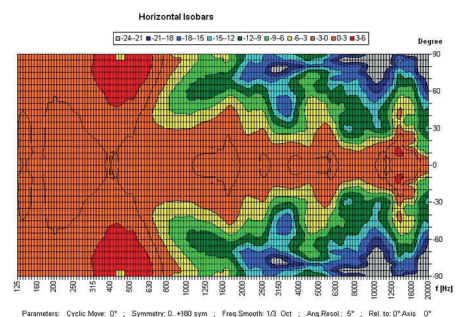

 n°1438 22 <b>Certificat n° : 1438-CPR-0868</b> <b>MAJORCOM:</b> 56 chemin de la Flambrère 31300 TOULOUSE FRANCE	<b>EN 54-24</b> Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings
	<b>CB 56T VA</b>  <b>Type A</b>